

Make it easy on your cars

ZETUM KR26




Product Features

- Affordable quality tyre both assuring ride comfort and dry handling
- Wide range of fitments for small and medium size cars performing well in both dry and wet conditions
- Symmetrical tread design with curved sipes to increase mileage and maximize comfort ride

Test Result & Technology


█ : ZETUM KR26 █ : Competitors

*Test Vehicle & Size : TOYOTA CAMRY, 215/60R16

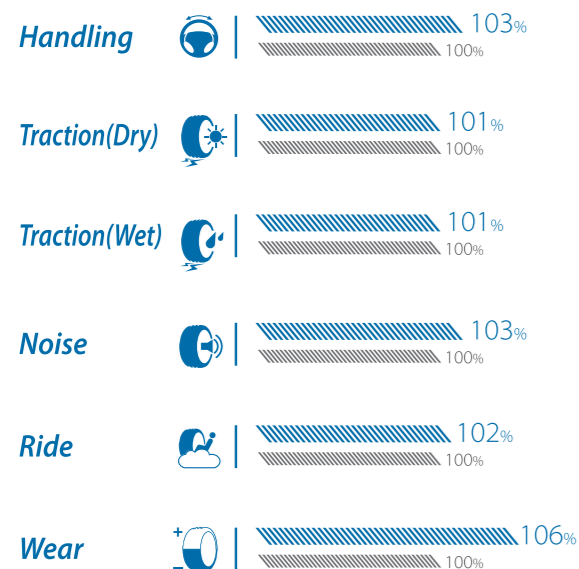

A. Optimized tread block design for longer tread life

- Evenly distributed ground contact pressure tread design for improved wear rating and mileage
- Well-balanced block stiffness for high mileage

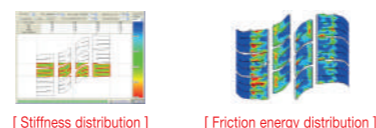

B. Enhanced dry handling

- Lateral pitching shoulder with curved sipes for improved dry handling

C. Low Noise & Comfortable ride

- Delivers a quiet ride by applying Optimal Pitch Sequence Technology(OPST)

D. Resistance to wet conditions

- 3 Wide channel grooves applied to improve hydroplaning performance in wet weather performance

ZETUM KR26

Rim	Tyre Size	Measuring Rim Width	Approved Rim Width	Max. Air Pressure		Max. Load		Section Width		Overall Diameter		Tread Depth	Static Loaded Radius	Rolling Circumference	EU Labeling			
				bar	psi	kg	lbs	mm	inch	mm	inch				mm	mm	RR	Wet Grip
17"	235/55 R17 99H	7.5	6.5 - 8.5	3.0	44	775	1709	245	9.6	690	27.2	7.7	9.7	317	2105	C	E	71
	225/50 R17 94H	7.0	6.0 - 8.0	3.0	44	670	1477	233	9.2	658	25.9	7.7	9.7	304	2007	E	E	70
	225/55 R17 97H	7.0	6.0 - 8.0	3.0	44	730	1609	233	9.2	680	26.8	7.7	9.7	313	2074	E	E	70
	225/65 R17 102H	6.5	6.0 - 8.0	3.0	44	850	1874	228	9.0	724	28.5	7.7	9.7	330	2208	C	E	70
	215/55 R17 94H	7.0	6.0 - 7.5	3.0	44	670	1477	226	8.9	668	26.3	7.7	9.7	308	2037	C	E	70
16"	225/55 R16 95H	7.0	6.0 - 8.0	3.0	44	690	1521	233	9.2	654	25.7	7.7	9.7	300	1995	E	E	70
	225/60 R16 98H	6.5	6.0 - 8.0	3.0	44	750	1653	228	9.0	676	26.6	7.7	9.7	308	2062	C	E	69
	225/65 R16 100H	6.5	6.0 - 8.0	3.0	44	800	1764	228	9.0	698	27.5	7.7	9.7	317	2129	C	E	70
	215/55 R16 93H	7.0	6.0 - 7.5	3.0	44	650	1433	226	8.9	642	25.3	7.7	9.7	295	1958	E	E	69
	215/60 R16 95H	6.5	6.0 - 7.5	3.0	44	690	1521	221	8.7	664	26.1	7.5	9.4	304	2025	E	E	69
	215/65 R16 98H	6.5	6.0 - 7.5	3.0	44	750	1653	221	8.7	686	27.0	7.7	9.7	312	2092	E	E	69
	205/55 R16 91H	6.5	5.5 - 7.5	3.0	44	615	1356	214	8.4	632	24.9	7.7	9.7	291	1928	E	E	69
	205/60 R16 92H	6.0	5.5 - 7.5	3.0	44	630	1389	209	8.2	652	25.7	7.5	9.4	299	1989	E	E	69
15"	215/65 R15 96H	6.5	6.0 - 7.5	3.0	44	710	1565	221	8.7	661	26.0	7.5	9.4	300	2016	C	E	69
	215/70 R15 98T	6.5	5.5 - 7.0	3.0	44	750	1653	221	8.7	683	26.9	7.7	9.7	308	2083	C	E	69
	205/60 R15 91H	6.0	5.5 - 7.5	3.0	44	615	1356	209	8.2	627	24.7	7.5	9.4	286	1912	C	E	69
	205/65 R15 94H	6.0	5.5 - 7.5	3.0	44	670	1477	209	8.2	647	25.5	7.5	9.4	294	1973	E	F	69
	205/70 R15 96T	6.0	5.0 - 7.0	3.0	44	710	1565	209	8.2	669	26.3	7.7	9.7	303	2040	C	E	69
	205/75 R15 97T	5.5	5.0 - 7.0	3.0	44	730	1609	203	8.0	689	27.1	7.7	9.7	311	2101	E	E	69
	195/55 R15 85H	6.0	5.0 - 7.0	3.0	44	515	1135	201	7.9	595	23.4	7.5	9.4	274	1815	E	E	69
	195/60 R15 88H	6.0	5.5 - 7.0	3.0	44	560	1235	201	7.9	615	24.2	7.7	9.7	282	1876	E	E	69
	195/65 R15 91H	6.0	5.5 - 7.0	3.0	44	615	1356	201	7.9	635	25.0	7.5	9.4	290	1937	C	E	69
	185/60 R15 84H	5.5	5.0 - 6.5	3.0	44	500	1102	189	7.4	603	23.7	7.7	9.7	277	1839	E	E	68
	185/65 R15 88H	5.5	5.0 - 6.5	3.0	44	560	1235	189	7.4	621	24.4	7.5	9.4	284	1894	C	E	69
	14"	195/60 R14 86H	6.0	5.5 - 7.0	3.0	44	530	1168	201	7.9	590	23.2	7.5	9.4	269	1800	E	E
195/70 R14 91H		6.0	5.0 - 6.5	3.0	44	615	1356	201	7.9	630	24.8	7.5	9.4	285	1922	E	E	69
185/60 R14 82H		5.5	5.0 - 6.5	3.0	44	475	1047	189	7.4	578	22.8	7.5	9.4	265	1763	E	E	69
185/65 R14 86H		5.5	5.0 - 6.5	3.0	44	530	1168	189	7.4	596	23.5	7.5	9.4	272	1818	E	E	69
185/65 R14 86T		5.5	5.0 - 6.5	3.0	44	530	1168	189	7.4	596	23.5	7.5	9.4	272	1818	E	E	69
185/70 R14 88T		5.5	4.5 - 6.0	3.0	44	560	1235	189	7.4	616	24.3	7.7	9.7	279	1879	E	E	69
175/65 R14 82H		5.0	5.0 - 6.0	3.0	44	475	1047	177	7.0	584	23.0	7.5	9.4	267	1781	E	E	69
175/65 R14 82T		5.0	5.0 - 6.0	3.0	44	475	1047	177	7.0	584	23.0	7.5	9.4	267	1781	E	E	69
165/60 R14 75H		5.0	4.5 - 6.0	3.0	44	387	853	170	6.7	554	21.8	7.5	9.4	255	1690	E	E	69
155/65 R14 75H		4.5	4.5 - 5.5	3.0	44	387	853	157	6.2	558	22.0	7.0	8.8	257	1702	F	E	69
13"	175/60 R13 77H	5.0	5.0 - 6.0	3.0	44	412	908	177	7.0	540	21.3	7.5	9.4	247	1647	E	C	69
	175/70 R13 82H	5.0	4.5 - 6.0	3.0	44	475	1047	177	7.0	576	22.7	7.5	9.4	261	1757	E	E	69
	175/70 R13 82T	5.0	4.5 - 6.0	3.0	44	475	1047	177	7.0	576	22.7	7.5	9.4	261	1757	E	E	69
	165/70 R13 79T	5.0	4.0 - 5.5	3.0	44	387	853	170	6.7	562	22.1	7.5	9.4	256	1714	E	C	69
	155/65 R13 73H	4.5	4.5 - 5.5	3.0	44	365	805	157	6.2	532	20.9	7.0	8.8	244	1623	F	C	69
155/70 R13 75H	4.5	4.0 - 5.0	3.0	44	387	853	157	6.2	548	21.6	7.5	9.4	250	1671	E	C	69	
155/70 R13 75T	4.5	4.0 - 5.0	3.0	44	387	853	157	6.2	548	21.6	7.5	9.4	250	1671	E	C	69	

KUMHO TIRE CO., INC.

KUMHO ASIANA Main Tower, 76, Saemunan-ro, Jongno-gu, Seoul, Korea
www.kumhotire.com